

AIR SUPPLY SYSTEM

COMPRESSORS & TYRE INFLATING GUNS


HIGH PRESSURE AIR BOTTLE COMPRESSORS

Standard compressor configuration with:

- automatic condensate drain with timer
- double pressure: 225 and 330 bar
- pressure switch for automatic stop
- non-return valve
- hours-counter (code B.21.0202)

Optionals available on request for DPH220 and DPH460 models:

- trolley (code B.21.0203)
- automatic pressure regulator (code B.21.0204)

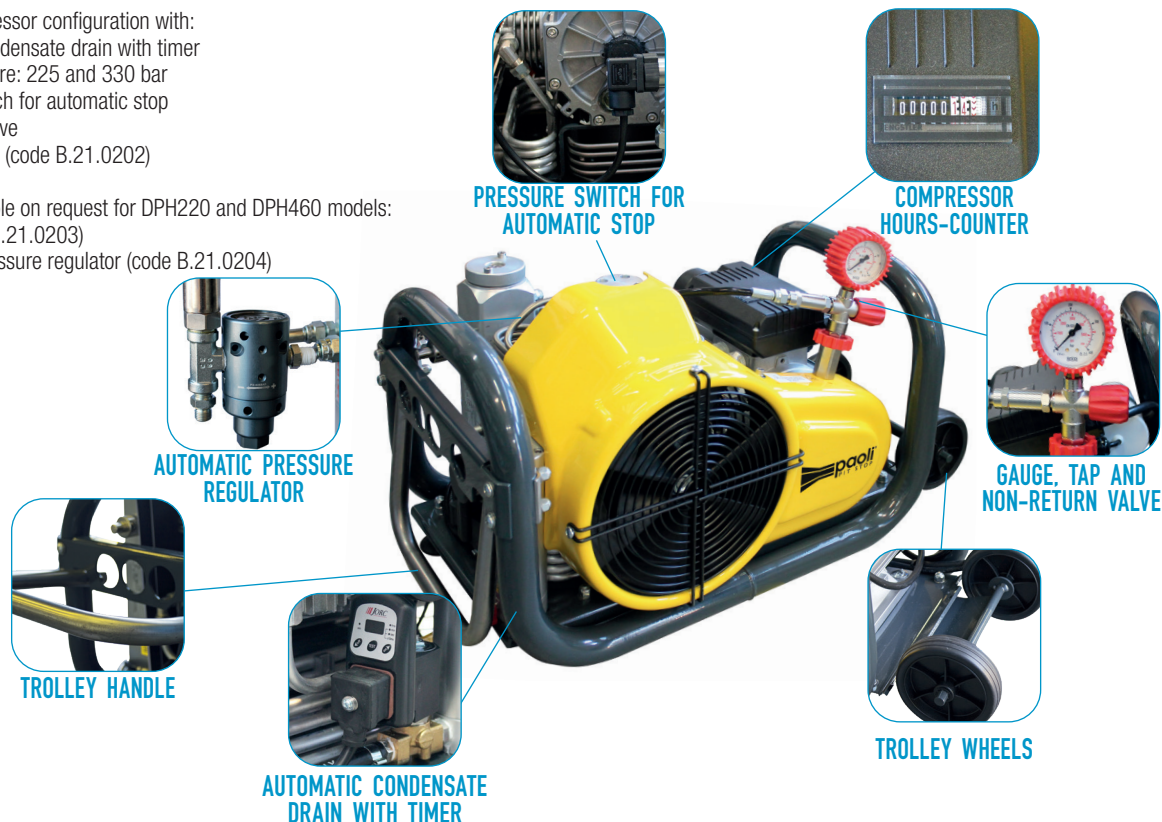

DPH380



DPH220



DPH460

PRODUCT CODE	PRODUCT NAME	ENGINE	CAPACITY	OPERATING PRESSURE	FILLING TIME	NOISE LEVEL	OVERALL DIMENSIONS	DRY WEIGHT
B.21.0101	DPH380 *	Three-phase Electric 5,5kW - 7,5HP	300 l/min - 10,6 CFM - 18 m³/h	300 bar 4350 psi	6' 44" (air bottle 10 l - 0-200 bar)	78 dB	118x54x69 cm 46 1/2x21 1/4x27 5/32 inch	137 kg 302 lb
B.21.0102	DPH220 *	Single-phase Electric 2,2kW - 3,0HP	100 l/min - 3,5 CFM - 6 m³/h	300 bar 4350 psi	20' (air bottle 10 l - 0-200 bar)	79 dB	58x41x41 cm 22 7/8x16 9/64x16 9/64 inch	42,5 kg 93,7 lb
B.21.0103	DPH460 *	Subaru Robin Petrol Engine 4,2kW - 6,0HP	100 l/min - 3,5 CFM - 6 m³/h	300 bar 4350 psi	20' (air bottle 10 l - 0-200 bar)	84 dB	75,5x39x41 cm 29 3/4x15 3/8x16 9/64 inch	42,0 kg 92,6 lb

* Standard: final pressure switch with automatic stop. The new Paoli PitStop Compressors can deliver both 220 bar and 300 bar air pressure thanks to the 2 different high pressure hoses included.



— DPH380-2 —



— DPH220-2 —



— DPH460-2 —

PRODUCT CODE	PRODUCT NAME	ENGINE	CAPACITY	OPERATING PRESSURE	FILLING TIME	NOISE LEVEL	OVERALL DIMENSIONS	DRY WEIGHT
B.21.0281	DPH380-2	Three-phase Electric 5,5kW - 7,5HP	315 l/min - 11,1 CFM - 18 m³/h	232-300-330 bar 3300-4300-4700 psi	6'20" (air bottle 10 l - 0-200 bar)	72 dB	112x63x77 cm 44.1x24.8x30.3 in	152 kg 335 lb
B.21.0280	DPH220-2	Single-phase Electric 2,2kW - 3,0HP	100 l/min - 3,5 CFM - 6 m³/h	232-300-330 bar 3300-4300-4700 psi	20' (air bottle 10 l - 0-200 bar)	72 dB	59,2x38x42,7 cm 23.3x15.0x16.8 inch	57,1 kg 125,9 lb
B.21.0282	DPH460-2	Honda HP 200 petrol 4,3kW - 7,7HP	100 l/min - 3,5 CFM - 6 m³/h	232-300-330 bar 3300-4300-4700 psi	20' (air bottle 10 l - 0-200 bar)	80,5 dB	79,8x37x43,5 cm 31.4x14.6x17.1 in	53 kg 116,8 lb

FLIGHT CASES FOR PAOLI COMPRESSORS



PROFESSIONAL TYRE INFLATING GUN




Unit of measure:
PSI, BAR, Kpa, Kg / cm²

— DTIG/1 —

DIGITAL TYRE-INFLATING GUN

PRODUCT CODE	DIMENSION	FOR PAOLI COMPRESSORS
B.48.0038	62,5x38x42,8 cm	DPH220 DPH460 DPH220-2 DPH460-2
B.48.0040	112x64x81 cm	DPH380 DPH380-2

PRODUCT NAME	DTIG/1
PRODUCT CODE	G.06.01.0002
PRESSURE GAUGE	Ø 80
WORKING PRESSURE	0 ÷ 12 BAR
HOSE LENGTH	100 cm
BATTERIES	lithium 3V

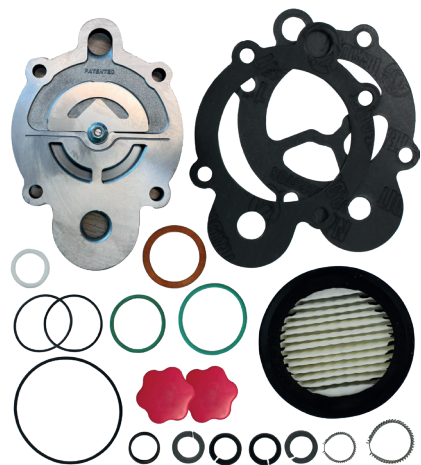

B.21.0163 - SERVICE KIT 500 H

Specifically designed for DPH220 and DPH460
The kit includes: o-rings, stage segments' kits, upper gasket, inferior gasket, red knob condensate drain valve, filling valve seal, plate valve.

B.21.0164 - SERVICE KIT 500 H

Specifically designed for DPH380
The kit includes: o-rings, washer, inlet filter cartridge, cylinder o-ring, outlet valve o-ring, valve plate o-ring.



STANDARD - B.21.0024



B.21.0028

PRODUCT CODE	DESCRIPTION
B.21.0024	DIN 300
B.21.0067	DIN/INT Reducer
B.21.0014	BC DIN 230
B.21.0028	BC Italian Connector
B.21.0025	BC DIN 300



PRODUCT CODE	QUANTITY	DESCRIPTION
B.27.0001	1 l	Oil for compressor pumping unit DPH6, DPH13
B.27.0003	0,5 l	Oil for compressor pumping unit DPH6, DPH13
B.27.0002	1 l	Oil for compressor engine unit
B.27.0026	1 l	Oil for compressor pumping unit DPH220, DPH460, DPH380